

PG990C Pure Cube Chapleau Gazebo Assembly Instructions



Requirements:

- 2 People (recommended)
- Rubber Mallet
- Tape Measure
- Cordless Drill
- Phillips & Robertson Drill Bits
- Hex Key Set
- Staple Gun
- 1 ¼" Staples
- Step Ladder

It is highly recommended to view the assembly video prior to starting assembly!

Manufactured by:

[View the assembly process](#) 

Pure Cube Chapleau Gazebo Assembly Instructions

Parts List

<u>Part #</u>	<u>Description</u>	<u>Quantity</u>
522020	33-1/2" Solid Wall Panel	3
522046	33-1/2" Open Air Gazebo Panel	3
522045	33-1/2" Half Louver Panel	3
205010	123" EPDM Rubber	1
824019	35-3/4"x107" Roof Panel - 3" Overhang on Back	3
522201	4x4x79-3/4" Corner Posts	4
524015	2x8x110-3/4" Nosing	3
524018	2x5x107" Back Nosing (Installed Under Overhang)	1
524013	2x3x111-3/8" Top Trim for Front (mitred both ends)	1
524016	2x3x112-1/2" Longest Top Trim for LEFT (mitred in 1 corner)	1
524017	2x3x112-1/2" Longest Top Trim for RIGHT (mitred in 1 corner)	1
502290	1x3x79" Cedar Trim for Wall Joints	14

Pure Cube Chapleau Gazebo Assembly Instructions

Gazebo Base Preparation

Make sure the base for your Gazebo is level .

A solid base for your Gazebo is recommended and can be made from any of the following.



Concrete Pad



Wood Deck



Crushed Stone



Patio Stone/Paver Blocks

Manufactured by:



tel: 888-923-9813 | info@leisurecraft.com | web: www.leisurecraft.com

Pure Cube Chapleau Gazebo Assembly Instructions

Gazebo Assembly



Start the assembly of your Chapleau gazebo by attaching a solid wall panel to one of the 4" x 4" posts using 4 of the provided 2 ¾" (70mm) Connector Lag screws in the pre drilled holes.



Attach a louvered wall panel to the 4" x 4" post on a 90° angle from the last panel using 4 of the provided 2 ¾" (70mm) Connector Lag screws in the pre drilled holes.



Place another solid wall panel next to the other solid panel and secure with the 2 ¾" (70mm) connector bolts and connector cap nuts.



Repeat for the 3rd solid wall panel.

Manufactured by:



tel: 888-923-9813 | info@leisurecraft.com | web: www.leisurecraft.com

Pure Cube Chapleau Gazebo Assembly Instructions



Attach a 4" x 4" post to one of the open air panels using 4 of the provided 2 ¾" (70mm) Connector Lag screws in the pre drilled holes.



Attach the remaining open air panel to the post at a 90° and place in the open corner.



Place one of the roof panels on top of the assembled wall.

The overhang is to be at the back of the gazebo.




Ensure the roof panel is flush to the wall panels and secure with 2 - 2 ½" (64mm) screws in each panel.

Manufactured by:



tel: 888-923-9813 | info@leisurecraft.com | web: www.leisurecraft.com

Pure Cube Chapleau Gazebo Assembly Instructions

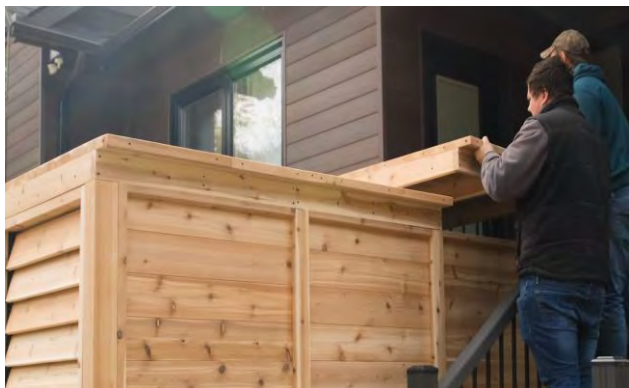

Place the remaining two roof panels onto the top of the gazebo ensuring the overhang is towards the back.



Inside , line up the holes and fasten the roof panels together with 2 $\frac{3}{4}$ " (70mm) connector bolts and nuts.

When you have the roof panels connected, tighten up the bolts with a drill and hex key.



Ensure the wall panels are flush to the roof panels secure the walls to the panels using 2 - 2 $\frac{1}{2}$ " (64mm) screws in each panel.



Place the first side fascia board.

Ensure it is flush to bottom and the front of the roof panel.

Manufactured by:



tel: 888-923-9813 | info@leisurecraft.com | web: www.leisurecraft.com

Pure Cube Chapleau Gazebo Assembly Instructions



Secure the side fascia piece from the inside of the gazebo using the 2 ¾" (70mm) Connector Lag screws through the 4 pre drilled holes.

Repeat on the opposite side.



Repeat the process for the front fascia board.



Place the EPDM rubber membrane evenly over the roof.



Once the membrane is laid out evenly, tuck it along the trim and staple it to the top of the fascia trim using 1 ¼" (32mm) staples.

Continue to staple the membrane down on the 3 sides that have the trim installed.

Manufactured by:

Pure Cube Chapleau Gazebo Assembly Instructions



Cover all the wall seams with the trim pieces.

Secure with 1 ¼" (32mm) staples.

The 4 pieces for the back wall will need to be cut to size to fit under the back nosing board.



Repeat on the seams on the inside of the gazebo.

Congratulations!

Your Pure Cube Chapleau Gazebo assembly is now complete!

- Wall panels may be placed in various locations depending on owners preference.
 - Additional wall panels are available to purchase to add to Gazebo.

Manufactured by:



tel: 888-923-9813 | info@leisurecraft.com | web: www.leisurecraft.com



WARRANTY

Dundalk LeisureCraft Inc. warrants our saunas against defects in materials and workmanship under normal/residential use for a period of five (5) years, as applicable, from the date of receipt of the product by the original end-user consumer. This warranty does not apply to normal wear and tear and/or natural weather conditions. This warranty does not cover regular required maintenance of the sauna, (eg. Tightening bands on the barrels, cleaning or staining the sauna) refer to your sauna assembly manual for maintenance guidelines. This warranty does not cover misuse or negligence and the manufacturer and associated retailers are not liable for any injury or damage caused by the product. This warranty is a parts only warranty and any service or labor costs would not be considered as part of the 5 year warranty.

Purchaser Name: _____ Date: _____

Purchased From: _____

Manufactured by:



tel: 888-923-9813 | info@leisurecraft.com | web: www.leisurecraft.com